


# DAISEIKAI 8

## New Air Purifier



Impurities are ionized by the plasma ion charger and absorbed by heat exchanger

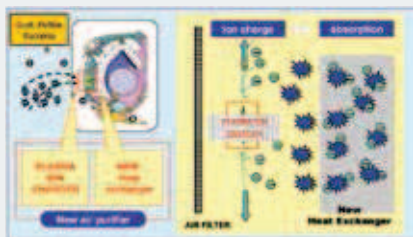

## Higher standard in efficiency and comfort.

High energy efficiency class, both in cooling and heating (A+++ for sizes 10 & 13).

Elegant design.

Low energy consumption in minimum capacity: When demand is reduced, the unit reduces also its capacity and achieves lower power consumption.

Wide operating range.

Improved airflow features

Pico Ionizer with possibility to enhance humidity in air.

User friendly wireless remote control and optimal customization.



тел. (02) 483 60 90

моб. 0884 47 40 40

[www.mr-climate.com](http://www.mr-climate.com)

e-mail: [office@mr-climate.com](mailto:office@mr-climate.com)

# G 2 K V P

## DAISEIKAI 8

## INVERTER HIGH-WALL



INDOOR UNITS

- RAS-10G2KVP-E
- RAS-13G2KVP-E
- RAS-16G2KVP-E



OUTDOOR UNITS

- RAS-10G2AVP-E
- RAS-13G2AVP-E
- RAS-16G2AVP-E



REMOTE CONTROLS

- WIRELESS

<b>G2AVP +G2KVP</b>		<b>Performance data</b>		
<b>Outdoor unit</b>		RAS-10G2AVP-E	RAS-13G2AVP-E	RAS-16G2AVP-E
<b>Indoor unit</b>		RAS-10G2KVP-E	RAS-13G2KVP-E	RAS-16G2KVP-E
Cooling capacity	kW	2,50	3,50	4,50
Cooling range (min. - max.)	kW	0,55 - 3,5	0,63 - 4,1	0,63 - 5,0
Power input (min. - rated - max.)	kW C	0,11 - 0,485 - 0,9	0,17 - 0,82 - 1,20	0,17 - 1,30 - 1,75
EER	W/W	5,15	4,27	3,46
SEER		9,10	8,90	7,30
Energy efficiency class	C	A+++	A+++	A++
Seasonal electricity consumption	kWh/a C	96	138	216
Annual energy consumption	kWh	243	410	650
Heating capacity	kW	3,2	4,0	5,5
Heating range (min. - max.)	kW	0,45 - 5,8	0,65 - 6,3	0,65 - 6,8
Power input (min. - rated - max.)	kW H	0,09 - 0,58 - 1,65	0,14 - 0,80 - 1,77	0,14 - 1,37 - 2,05
COP	W/W	5,52	5,00	4,01
SCOP (Average)		5,20	5,10	4,60
Energy efficiency class (Average)	H	A+++	A+++	A++
Seasonal electricity consumption	kWh/a H	808	988	1369

<b>G2KVP</b>		<b>Physical data Indoor unit</b>		
<b>Indoor unit</b>		RAS-10G2KVP-E	RAS-13G2KVP-E	RAS-16G2KVP-E
Air Flow (max)	m <sup>3</sup> /h - l/s C	648 - 180	672 - 187	696 - 193
Sound pressure level (h/l (q))	dB(A) C	42/24 (20)	43/25 (21)	44/26 (23)
Sound power level (h)	dB(A) C	57	58	59
Air Flow (max)	m <sup>3</sup> /h - l/s H	678 - 188	726 - 202	744 - 207
Sound pressure level (h/l (q))	dB(A) H	43/24 (20)	44/25 (21)	45/26 (23)
Sound power level (h)	dB(A) H	58	59	60
Dimensions (HxWxD)	mm	293x831x270	293x831x270	293x831x270
Weight	kg	14	14	14

<b>G2AVP</b>		<b>Physical data Outdoor unit</b>		
<b>Outdoor unit</b>		RAS-10G2AVP-E	RAS-13G2AVP-E	RAS-16G2AVP-E
Air Flow	m <sup>3</sup> /h - l/s C	1872 - 520	2160 - 600	2544 - 707
Sound pressure level	dB(A) C	46	48	49
Sound power level	dB(A) C	61	63	64
Operating range	°C C	-10~46	-10~46	-10~46
Air Flow	m <sup>3</sup> /h - l/s H	1872 - 520	2160 - 600	2544 - 707
Sound pressure level (h)	dB(A) H	47	49	50
Sound power level (h)	dB(A) H	62	64	65
Operating range	°C H	-15~24	-15~24	-15~24
Dimensions (HxWxD)	mm	630x800x300	630x800x300	630x800x300
Weight	kg	42	42	42
Compressor type		DC Twin Rotary	DC Twin Rotary	DC Twin Rotary
Flare connections (gas-liquid)		3/8" - 1/4"	3/8" - 1/4"	1/2" - 1/4"
Minimum pipe length	m	2	2	2
Maximum pipe length	m	25	25	25
Maximum height difference	m	10	10	10
Chargeless pipe length	m	15	15	15
Power supply	V-ph-Hz	220/240-1-50, 220/230-1-60	220/240-1-50, 220/230-1-60	220/240-1-50, 220/230-1-60

C = cooling mode  
H = heating mode

h/l (q) = high / low speed (quiet)